




5/8"
KB-TZ, KB-TZ SS 304,
KB-TZ SS 316

2143082 A4-10.2019

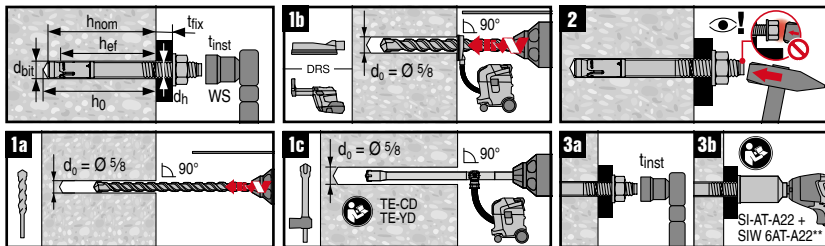

Anchor diameter	[inch]	5/8							
d _{bit}	[inch]	5/8							
Anchor Length	[inch]	4 3/4		6		8 1/2		10	
h _{ef}	[inch]	3 1/8	3 1/8	4	4	3 1/8	4	3 1/8	4
min. h _{nom}	[inch]	3 9/16	3 9/16	4 7/16	4 7/16	3 9/16	4 7/16	3 9/16	4 7/16
min. h ₀ ***	[inch]	3 3/4	3 3/4	4 3/4	4 3/4	3 3/4	4 3/4	3 3/4	4 3/4
T _{inst}	[ft-lb]	60		60		60		60	
T _{inst} (Masonry)	[ft-lb]	35		35		35		35	
d _h	[inch]	1 1/16		1 1/16		1 1/16		1 1/16	
WS (Wrench Size)	[inch]	15/16		15/16		15/16		15/16	
max. t _{fix}	[inch]	9/16	1 13/16	15/16	15/16	4 5/16	3 7/16	5 13/16	4 15/16

Use only carbide-tipped masonry drill bits complying with ANSI B212.15.1994

** Adaptive torque (AT) system not applicable for installation in concrete masonry unit / grout filled block

*** AT System not applicable for wood fastening applications

*** For a non-hole cleaning installation (step 1a or 1b), make sure to drill deep enough to achieve h₀, taking into account the depth of debris remaining in the hole